




APPLICATION
FARM & CONST.
4X4



FARM & HIGHWAY SERVICE (D.O.T APPROVED)

IMPLEMENT TYRES

- Offers D.O.T. compliance for approved operation at highway speeds.
- Noted for its great handling and towing characteristics.

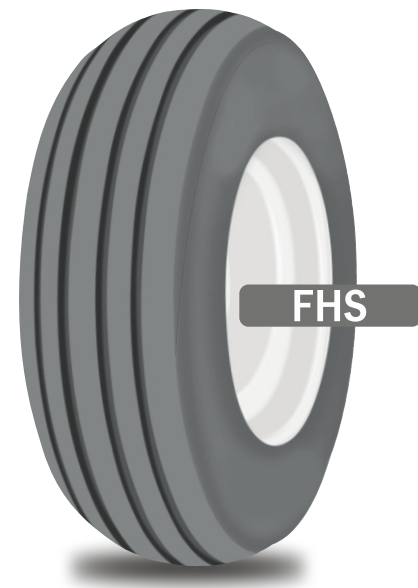

SIZE	PATTERN	PLY RATING	RIM WIDTH	TT or TL	SECTION WIDTH		OVERALL DIAMETER		STATIC LOADED RADIUS		ROLLING CIRCUM ± 2.5 %		NSD		LOAD CAPACITY		INFLATION PRESSURE		LOAD INDEX	SPEED	
					mm	inch	mm	inch	mm	inch	mm	inch	mm	32nds	kg	lbs	bar	psi		kmph	mph
			inch																		
9.5L-15FI	FHS	12	8.0	TL	249	9.8	767	30.2	343	13.5	2260	89	9	11	1215	2673	4.2	60	115	D/65kmph	D/40mph
11L-15FI	FHS	12	8.0	TL	266	10.5	790	31.1	353	13.9	2336	92	10	13	1800	3960	6.3	90	128	D/65kmph	D/40mph
12.5-15FI	FHS	12	10.0	TL	325	12.8	838	33.0	368	14.5	2464	97	10	13	2120	4664	6.3	90	134	D/65kmph	D/40mph